



BZ5/6

HO-RI-SR10
Universal Aluminium Wall Mount
Available in black or white



BZ5

3-Way Full-Range Speaker

- AES Power 80 W / 8 Ω
- Bandwidth (-6dB) ... 90 Hz to 20 KHz
- Sensitivity 88 dB / 1W @1m
- SPL MAX Level 107 dB
- Directivity (-6dB) 100° H x 60° V

- **LF** 1 x speaker 5" bass-reflex
- **MF** 1 x speaker 3" bass-reflex
- **HF** 1 x Tweeter 0.25"

- Connections 2 Spk NL4 or Phoenix 4 pts
- Rigging 1 x M10 (for bracket)
2 x M6 (for wall mounting ball)
1 x M6 (pour safety chain)
- Enclosure 12 mm Baltic Birch wood
- Finish Polyurethane painting
- Dim H370 x D247 x W144 mm - 4.5 kg



On request :
White or RAL
colors for BZ5/6.





Ideally positioned parallel to a wall or used as a monitoring speaker.



BZ5/6

HO-RI-SR10
Universal Aluminium Wall Mount
Available in black or white



BZ6

3-Way Full-Range Speaker


- AES Power100 W / 8 Ω
- Bandwidth (-6dB) ...75 Hz to 20 KHz
- Sensitivity91 dB / 1W @1m
- SPL MAX Level109 dB
- Directivity (-6dB)100° H x 60° V

- LF1 x 6" bass-reflex speaker
- MF2 x 3" bass-reflex speaker
- HF1 x Tweeter 0.25"


- Connections2 Spk NL4 or Phoenix 4 pts
- Rigging1 x M10 (for bracket)
2 x M6 (for wall mounting ball)
1 x M6 (for safety chain)
- Enclosure12 mm Baltic Birch Wood
- FinishPolyurethane painting
- DimH452 x D288 x W154 mm - 5,15 kg




BZ5 - Dimensions in mm

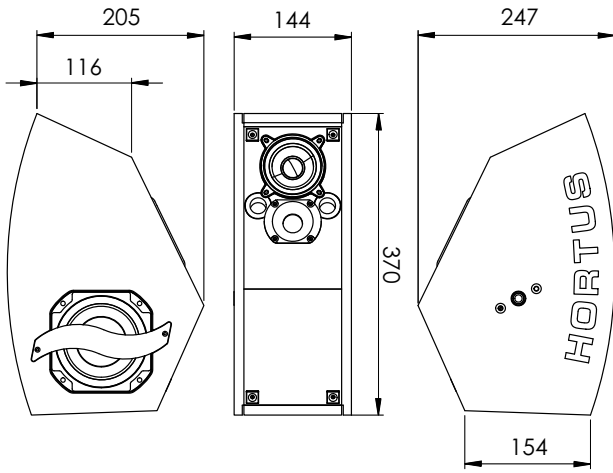


BZ6 - Dimensions in mm

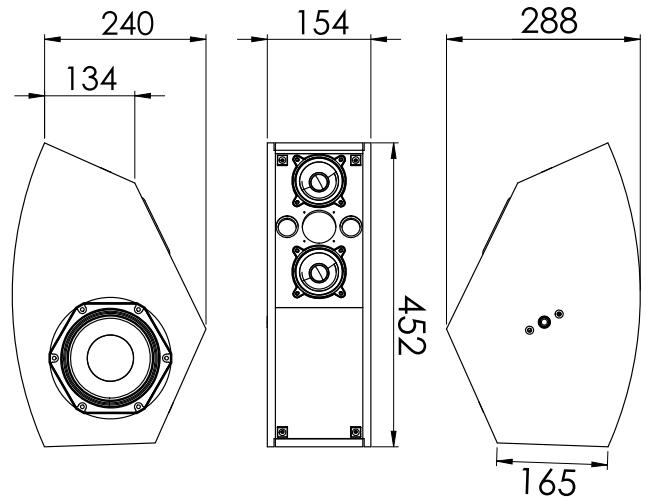


BZ6 - Nominal Horizontal Coverage

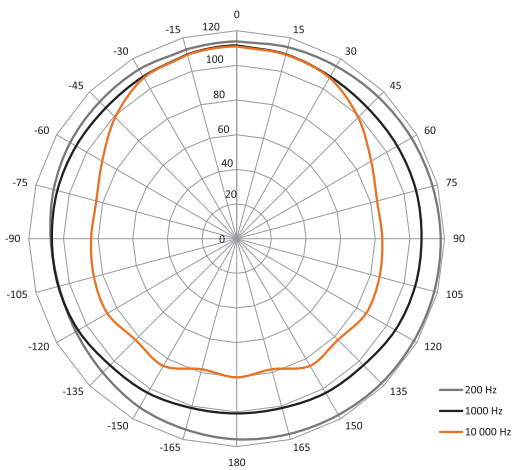

BZ6 - Nominal Vertical Coverage

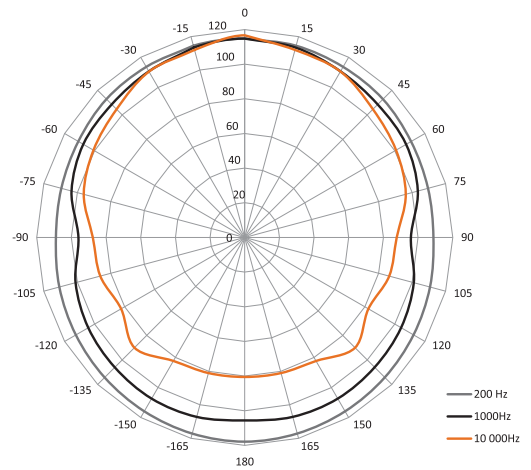

CURVE SERIES ACCESSORIES

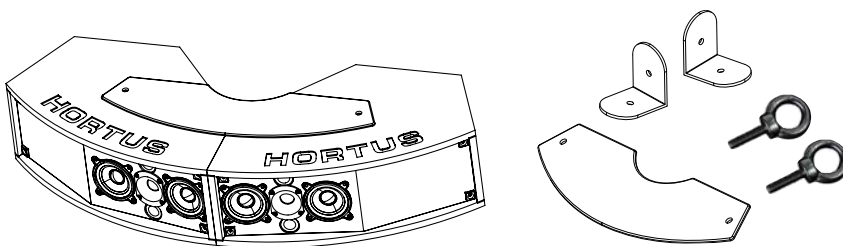

COUPLING KIT FOR 2 BZ

- 1 Coupling plate
- 2 fixing brackets
- 2 M10 rings
- 2 M10 screws
- 4 Fixing brackets screws